


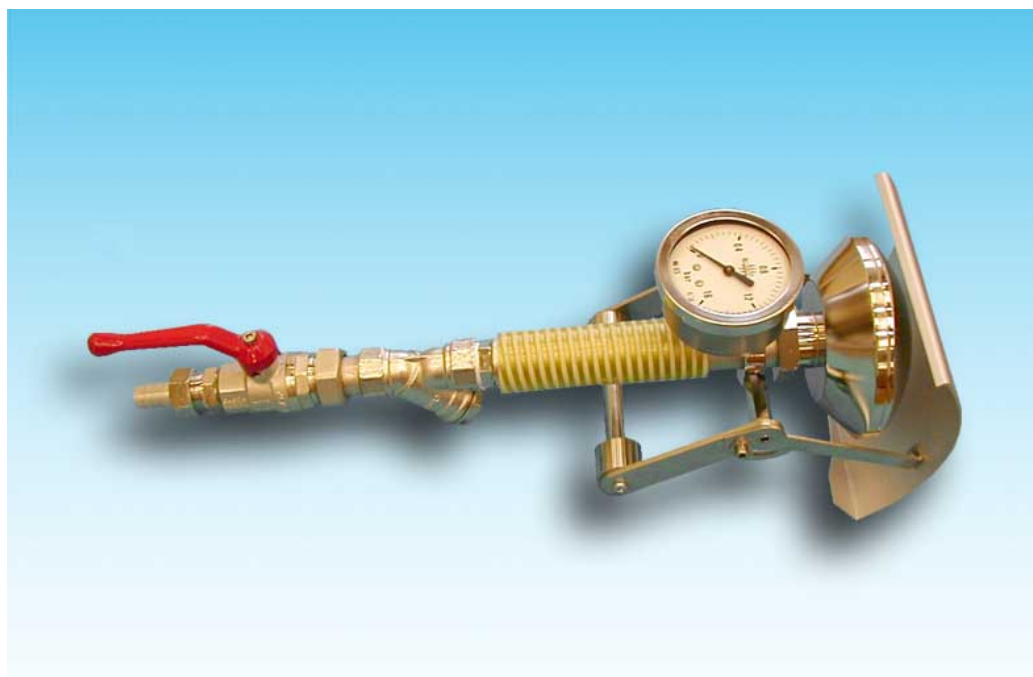

T1-36

SPRAY NOZZLE

KEYWORDS

SPRAY NOZZLE, IEC 60529, ...

COMPLIANCE

T1-36 SPRAY NOZZLE is designed and manufactured in compliance with IEC 60529 and many other standards.

http://webstore.iec.ch/preview/info_iec60529%7Bed2.1%7Db.pdf

DESCRIPTION

T1-36 SPRAY NOZZLE is intended for establishing the degree of protection against ingress of water for class IPX3 and IPX4 (Protected against spraying and splashing water).

FEATURES

- Spray nozzle made of nickel plated brass
- Moving shield for spraying angle adjustment
- Water filter
- Handle with isolation against cold
- Ball valve for water flow regulation and for turning off
- Pressure gauge
- Hose connector

DESIGN

All parts are galvanically protected, or stainless steel, it is packed in wooden box that indicates conformity with IEC standard.

TECHNICAL SPECIFICATION

Pressure gauge

range	0 - 1.6 bar
accuracy	2.5 %

OTHER CONDITIONS

Warranty: 2 years

Support by E-mail: support@testing.si

On line Skype VIDEO Support: Testing_support, matejsimonic

We will be glad to help you and to hear any feedback from you.

The equipment described here is subject to redesign without notice. The change will not impair the function of apparatus its characteristics or the price.